

Release Notes for DrayTek VigorAP 805 (UK/Ireland)

Firmware Version	5.1.0.1 (Formal Release)
Release Type	Regular – Upgrade recommended when convenient
Release Date	8 th May 2026
Build Date	16 th March 2026
Web Version	r4424.ee7377c3
Core Version	r690
Applicable Models	VigorAP 805
Locale	UK Only

New Features

(None)

Improvements

1. Resolved an issue that previously prevented Two-Factor Authentication settings from being saved

Known Issues

(None)

Firmware File Types


The file name of the firmware controls which upgrade type is performed.

If the file name is unchanged (e.g. xxxx.**sfw**) then the upgrade will just upgrade the firmware, whereas renaming the firmware to a **.rst** extension will wipe all settings back to factory defaults when upgrading the firmware.

Upgrade Instructions

It is recommended that you take a configuration backup prior to upgrading the firmware. This can be done from the AP's system maintenance menu.

To upgrade firmware, select '*firmware upgrade*' from the AP's system maintenance menu and select the correct file. The access point will perform the upgrade and automatically reboot once this completes.

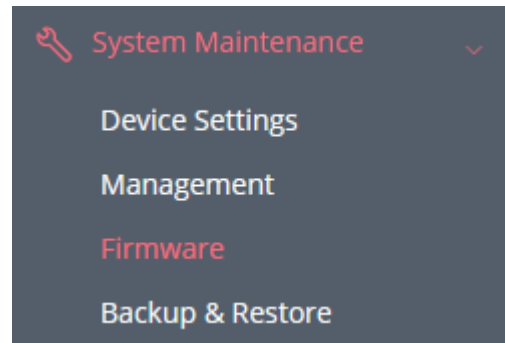

Manual Upgrade

If you cannot access the AP's menu, you can put the AP into 'TFTP' mode by holding the FACTORY RESET button whilst turning the unit on and then use the Firmware Utility. That will enable TFTP mode. TFTP mode is indicated by all LEDs flashing. This mode will also be automatically enabled by the router if there is a firmware/settings abnormality. Upgrading from the web interface is easier.

Firmware Version	5.1.0 (Formal Release)
Release Type	Important – Review release notes and upgrade if the changes affect your system stability, performance, or security
Build Date	12 th January 2026
Release Date	9 th February 2026
Web Version	r4362.973fd7ff
Core Version	r688
Applicable Models	VigorAP 805
Locale	UK Only

New Features

1. Support for Isolate client from Wired LAN in [Configuration] > [Wireless LAN] > [SSID]

Improvements

2. Compliance with EN 18031 cybersecurity requirements
3. Improvements to the stability of mesh network
4. Add the quantity of Total Clients, 2.4Ghz Clients and 5Ghz Clients in [Monitoring] > [Clients List]
5. Fix an issue with intermittent slow loading websites and images
6. Fix an issue with the time overlap between two schedule profiles
7. Improvements related to VLAN settings, such as VLAN tags being removed by the Wi-Fi driver and receiving VLAN packets unrelated to the port configuration

Known Issues

(None)

Firmware Version	5.0.7 (Formal Release)
Release Type	Important – Review release notes and upgrade if the changes affect your system stability, performance, or security
Build Date	12 th August 2025
Release Date	5 th September 2025
Web Version	r4242.7da93d6c
Core Version	r669
Applicable Models	VigorAP 805
Locale	UK Only

New Features

(None)

Improvements

1. Improvements to the WUI access that could be affected by long-term use of DHCP

Known Issues

(None)

Firmware Version	5.0.6 (Formal Release)
Release Type	Regular – Upgrade recommended when convenient
Build Date	12 th August 2025
Release Date	23 rd July 2025
Web Version	r4228.b62a3736
Core Version	r669
Applicable Models	VigorAP 805
Locale	UK Only

New Features

(None)

Improvements

1. Multiple SSID schedule profiles can now be used in [Configuration] > [Wireless LAN] > [Radio Settings]
2. The network connection status can be shown in [System Maintenance] > [Management] > [XMPP]
3. Improvements to the management VLAN that could be set back to default when using config sync in AP management

Known Issues

(None)

Firmware Version	5.0.5 (Formal Release)
Release Type	Critical – Upgrade recommended immediately
Build Date	14 th April 2025
Release Date	24 th April 2025
Web Version	r4135.2862fb02
Core Version	r656
Applicable Models	VigorAP 805
Locale	UK Only

New Features

(None)

Improvements

1. WLAN driver updates with security improvements (CVE-2025-20631, CVE-2025-20632 and CVE-2025-20633)
2. The 'Default VLAN' is added to [Configuration] > [LAN] > [VLAN List]
3. The [Configuration] > [LAN] > [Interface VLAN] section added for port VLAN configuration
4. The [System Maintenance] > [Management] > [XMPP] section added for XMPP protocol
5. SSH server security improvements (proxy-related functions has been disabled)

Known Issues

(None)

Firmware Version	5.0.3 (Formal Release)
Release Type	Initial Release
Build Date	2 nd December 2024
Release Date	28 th January 2025
Web Version	r4047.59bc8092
Core Version	r640
Applicable Models	VigorAP 805
Locale	UK Only

First Firmware Release for this model

[END OF FILE]