

## **Release Notes for DrayTek VigorAP 905 (UK/Ireland)**

Firmware Version	5.1.0.1 (Formal Release)
Release Type	<b>Regular</b> – Upgrade recommended when convenient
Release Date	7 <sup>th</sup> April 2026
Build Date	16 <sup>th</sup> March 2026
Web Version	r4424.ee7377c3
Core Version	r690
Applicable Models	VigorAP 905
Locale	UK Only

### **New Features**

(None)

### **Improvements**

1. Resolved an issue that previously prevented Two-Factor Authentication settings from being saved

### **Known Issues**

(None)

---

## Firmware File Types


The file name of the firmware controls which upgrade type is performed.

If the file name is unchanged (e.g. xxxx.**sfw**) then the upgrade will just upgrade the firmware, whereas renaming the firmware to a **.rst** extension will wipe all settings back to factory defaults when upgrading the firmware.

## Upgrade Instructions

It is recommended that you take a configuration backup prior to upgrading the firmware. This can be done from the AP's system maintenance menu.

To upgrade firmware, select '*firmware upgrade*' from the AP's system maintenance menu and select the correct file. The access point will perform the upgrade and automatically reboot once this completes.

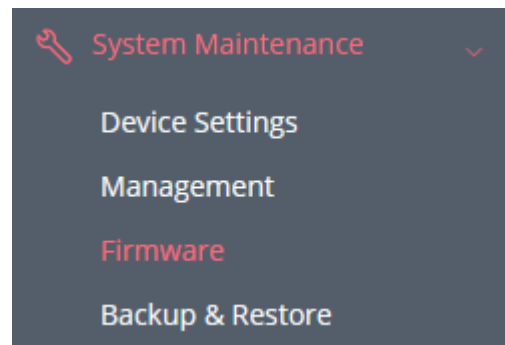

## Manual Upgrade

If you cannot access the AP's menu, you can put the AP into 'TFTP' mode by holding the FACTORY RESET button whilst turning the unit on and then use the Firmware Utility. That will enable TFTP mode. TFTP mode is indicated by all LEDs flashing. This mode will also be automatically enabled by the router if there is a firmware/settings abnormality. Upgrading from the web interface is easier.

---

Firmware Version	5.1.0 (Formal Release)
Release Type	<b>Important</b> – Review release notes and upgrade if the changes affect your system stability, performance, or security
Release Date	12 <sup>th</sup> January 2026
Build Date	9 <sup>th</sup> February 2026
Web Version	r4362.973fd7ff
Core Version	r688
Applicable Models	VigorAP 905
Locale	UK Only

### **New Features**

1. Support for Isolate client from Wired LAN in [Configuration] > [Wireless LAN] > [SSID]

### **Improvements**

1. Compliance with EN 18031 cybersecurity requirements
2. Improvements to the stability of mesh network
3. Add the quantity of Total Clients, 2.4Ghz Clients and 5Ghz Clients in [Monitoring] > [Clients List]
4. Fix an issue with intermittent slow loading websites and images
5. Fix an issue with the time overlap between two schedule profiles
6. Improvements related to VLAN settings, such as VLAN tags being removed by the Wi-Fi driver and receiving VLAN packets unrelated to the port configuration

### **Known Issues**

(None)

Firmware Version	5.0.7 (Formal Release)
Release Type	<b>Important</b> – Review release notes and upgrade if the changes affect your system stability, performance, or security
Release Date	12 <sup>th</sup> August 2025
Build Date	5 <sup>th</sup> September 2025
Web Version	r4242.7da93d6c
Core Version	r669
Applicable Models	VigorAP 905
Locale	UK Only

### **New Features**

(None)

### **Improvements**

1. Improvements to the WUI access that could be affected by long-term use of DHCP

### **Known Issues**

(None)

Firmware Version	5.0.6 (Formal Release)
Release Type	<b>Regular</b> – Upgrade recommended when convenient
Release Date	8 <sup>th</sup> August 2025
Build Date	23 <sup>rd</sup> July 2025
Web Version	r4228.b62a3736
Core Version	r669
Applicable Models	VigorAP 905
Locale	UK Only

### **New Features**

(None)

### **Improvements**

1. Multiple SSID schedule profiles can now be used
2. The '4T4R' antenna option has been removed from [Configuration] > [Wireless LAN] > [Radio Settings]
3. Fix for the issue where AP could become unresponsive after firmware update
4. The gateway information via the Wireless App can now be properly shown
5. In some circumstance an issue could occur while attempting to ping the IP address of the VigorAP
6. Improvements to the management VLAN that could be set back to default when using config sync in AP management

### **Known Issues**

(None)

Firmware Version	5.0.4 (Formal Release)
Release Type	<b>Initial Release</b>
Release Date	12 <sup>th</sup> June 2025
Build Date	12 <sup>th</sup> March 2025
Web Version	r4135.2862fb02
Core Version	r656
Applicable Models	VigorAP 905
Locale	UK Only

**First Firmware Release for this model**

**[END OF FILE]**